

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
12 May 2005 (12.05.2005)

PCT

(10) International Publication Number  
**WO 2005/042941 A1**

(51) International Patent Classification<sup>7</sup>: **F02B 37/16**, 37/18, F02M 25/07

(21) International Application Number:  
PCT/EP2003/011599

(22) International Filing Date: 20 October 2003 (20.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **HONEYWELL INTERNATIONAL INC.** [US/US]; Columbia Road 101, Morristown, NJ 07962 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **NOELLE, Philippe** [FR/FR]; c/o Honeywell Garrett, B.P. 19 Z.I., Route d'On-court, F-88150 Thaon-Les-Vorges (FR).

(74) Agents: **LESON, Thomas, Johannes, Alois et al.**; c/o TBK-Patent, Bavariaring 4-6, 80336 München (DE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **ADJUSTABLE VALVE, IN PARTICULAR A RECIRCULATION VALVE FOR A TURBOCHARGER**

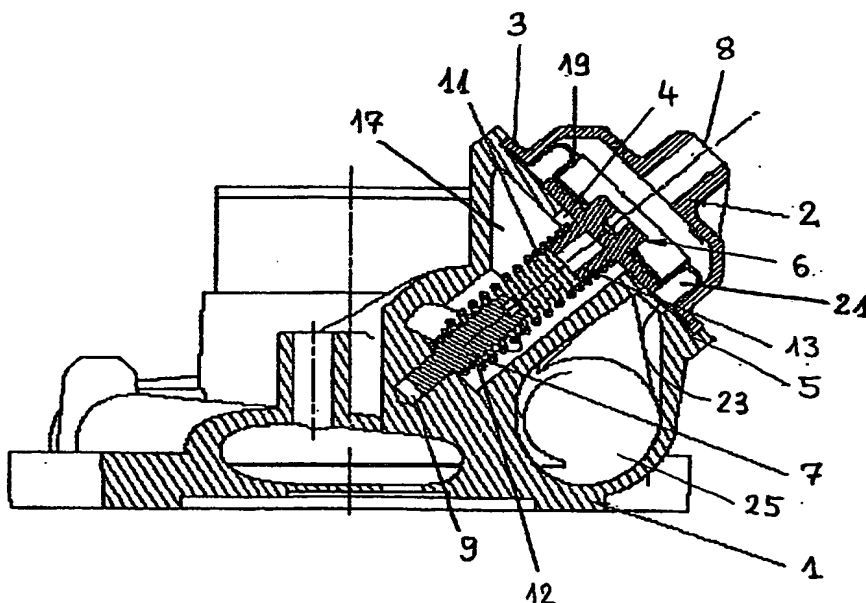

(57) Abstract: An adjustable valve comprises a valve member (6) for controlling the fluid flow through the valve and a coil spring (11) acting on the valve member and being supported on an adjustable retainer (7) threaded into the spring. The spring is threaded on the retainer (7) by means of a portion (12) of a reduced diameter so as to adjust a calibrating pre-tension of the spring acting on the valve member (6).

Best Available Copy



WO 2005/042941 A1